

---


**DIN 41617 31P MALE PRINT**

**€ 4,25**

Excl. BTW: € 3,51

**Afbeeldingen**

---

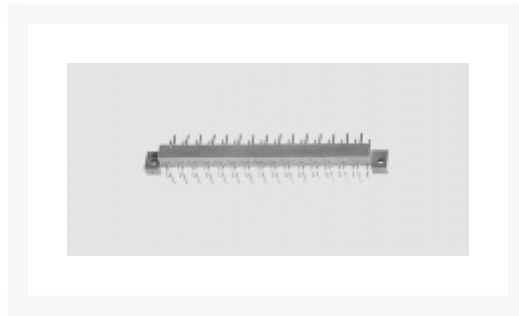

**Beschrijving**

---

Technical Specifications

Insulation Shell: Polycarbonate (UL94V-1), Glass Filled

Contact Material: Cu Alloy

Contact Surface: Hard Silver

Mating and Withdraw Force

13-Pole: ⚡30N

21-Pole: ⚡48N

31-Pole: ⚡70N

Air and Creepage (Contact/Mass): <sup>3</sup>1,0mm

Operating Voltage: 250V AC

Test Voltage (Contact/Mass): 1150Veff.

Insulation Group: A (VDE 0110)

Operating Current (20°C): 4A

Contact Resistance: ⚡15mW

Insulation Resistance: <sup>3</sup>1011W

Capacitance: ⚡1pF

Temperature Range: -55...+125°C

## Productinformatie

---

Artikelnummer	31.2661
Merk	Merk
Is on Sale	Nee

