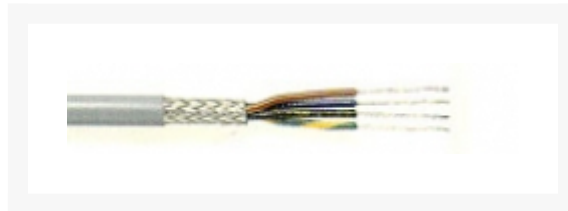

AFGESCHERMD 4X0.14MM2 ROND

€ 1,50

Excl. BTW: € 1,24

Afbeeldingen



Beschrijving

Features

Screening, Cu Plaited, Tinned: 85%
Conductor Insulation: PVC YI 2
Conductor Colours: DIN 47 100
Conductor Composition: 18x0,10mm
Outer Jacket: PVC YM 2
Colour: Grey (RAL 7032)
Flammability: Flame Resistant IEC332.1

Technical Specifications

Rated Voltage: 300V
Test Voltage: >1,5kV
Temperature Range Moving: -10...+70°C
Temperature Range Stationary: -30...+80°C
Insulation Resistance, Min.: 20MWxkm
Conductor Resistance, Max.: 135W/km
Cross-Section OuterØ [mm²]: 4x0,14
OuterØ [mm]: 4,00 ±0,15

Productinformatie

Artikelnummer	AKO4014
Merk	Merk
Is on Sale	Nee

