


## LED DRIVER 24-48V/2100MA 100W IP67 BEHUIZING

€ 38,50

Excl. BTW: € 31,82

### Afbeeldingen



### Beschrijving

#### Features

- Universal input
- Plastic enclosure IP67
- Overload protection, current limiting, auto recovery
- Protections: short circuit/over load/over voltage
- Protection Class 2
- Fixed output current



#### Technical Specifications



Input Voltage:	90...264V AC (47...63Hz)
	127...370V DC
Input Inrush Current, Max.:	75A
Withstand Voltage (I/P-O/P):	3000V AC
Operating Temperature:	-25...+50°C
Weight:	610g

I/P = Input, O/P = Output




Part Nr.	$U_A$ [V]	$I_A$ [mA]	$P_A$ [W]	$DI_A$ [%]	$U_{RN}$ [V <sub>p-p</sub> ]	$h$ [%]
LPC-100-350	143...286	350	100,1	5	1,5	90
LPC-100-500	100...200	500	100	5	1,5	90
LPC-100-700	72...143	700	100,1	5	1	90
LPC-100-1050	48...96	1050	100,8	5	1	90
LPC-100-1400	36...72	1400	100,8	5	1	89,5
LPC-100-1750	29...58	1750	101,5	5	1	89,5
LPC-100-2100	24...48	2100	100,8	5	1	89

$U_A$  = Output Voltage,  $I_A$  = Output Current Range,  $P_A$  = Output Power,  $DI_A$  = Output Current Tolerance,  $U_{RN}$  = Ripple & Noise,  $h$  = Typ. Efficiency




#### Note

Devices only for use in equipment with another primary purpose such as photocopiers, overhead projectors and slide projectors or for scale illumination or indication purposes.  
Suitable for indoor use and outdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.

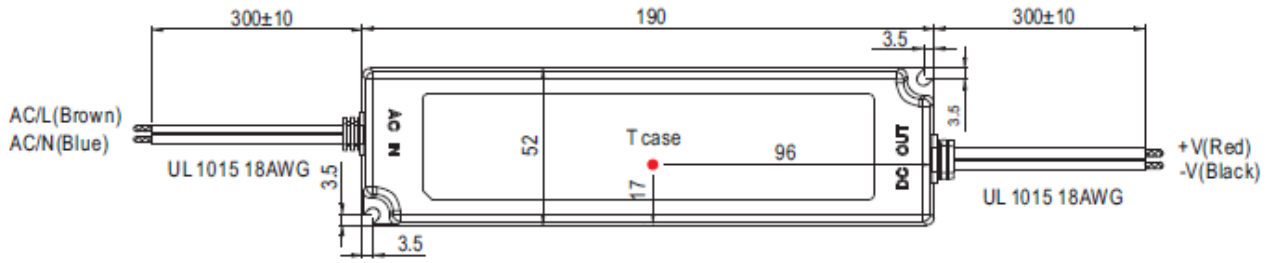

※ T case: Max. Case Temperature.

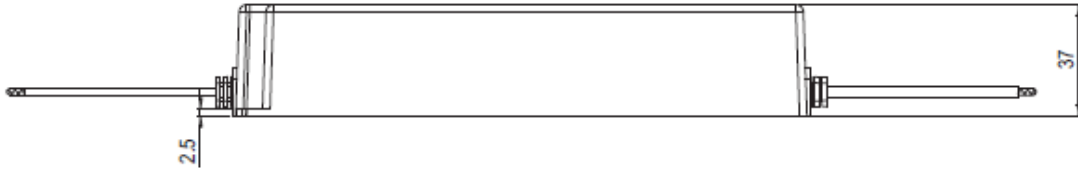

### Productinformatie

Artikelnummer	LPC1002100
Merk	MEANWELL

