


LED DRIVER 2.5-15VDC 350MA 3W

€ 18,95

Excl. BTW: € 15,66

Afbeeldingen

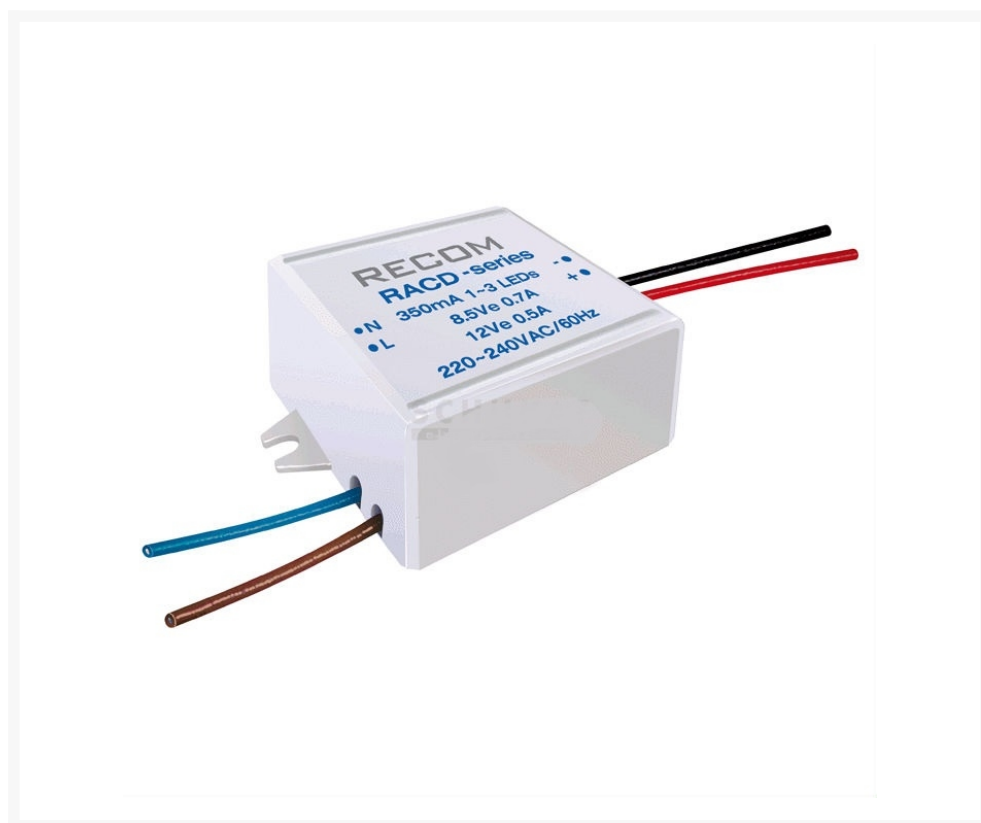

Beschrijving

Features

- Universal input
- Constant current
- not dimmable
- Plastic housing IP66
- Overload protection by current limiting
- Protected against short circuit, overload, overvoltage
- For LED and lighting applications
- Protection class II
- Safety standards: UL 8750; UL 1310; IEC 61347-2-13; EN 61347-2-13; IEC 61347-1; EN 61347-1
- EMC standards: EN 55015
- 3 years manufacturer warranty



Technical Specifications



| | |
|------------------------------|--------------------------|
| Input Voltage: | 90...264V AC (47...63Hz) |
| | 120...370V DC |
| Input Inrush Current, Max.: | 10A |
| Withstand Voltage (I/P-O/P): | 3750V AC |
| Operating Temperature: | -20...+40°C |
| Dimensions(LxWxH): | 52.1x29.6x23.1mm |
| Weight: | 45g |

I/P = Input, O/P = Output



| Part Nr. | U_A | I_A | P_A | I_{RN} | h |
|------------|----------|-------|-------|---------------------|-----|
| | [V] | [mA] | [W] | [A _{p-p}] | [%] |
| RACD03-350 | 2,5...15 | 350 | 3 | 0,1 | 72 |
| RACD03-700 | 2,5...6 | 700 | 3 | 0,1 | 62 |

U_A = Output Voltage, I_A = Output Current, P_A = Output Power, I_{RN} = Ripple & Noise, h = Typ. Efficiency

Productinformatie

| | |
|---------------|------------|
| Artikelnummer | RACD03-350 |
| Merk | RECOM |

