


LED DRIVER 2.5-6VDC 700MA 3W

€ 18,95

Excl. BTW: € 15,66

Afbeeldingen

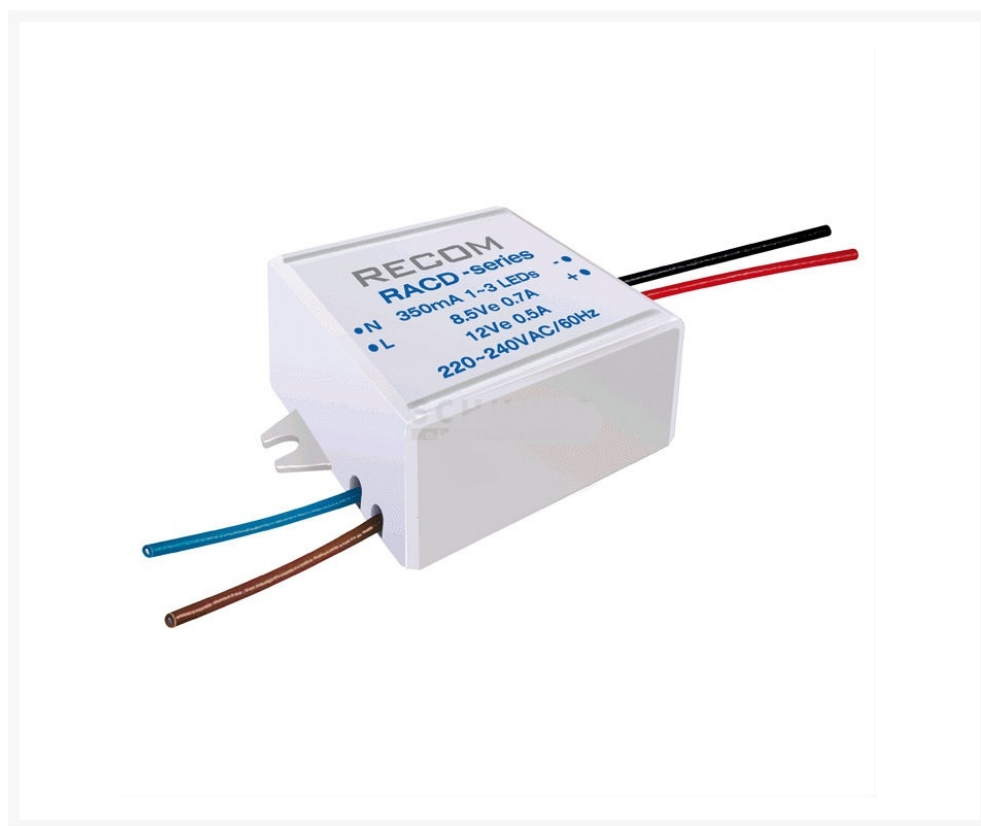

Beschrijving

Features

- Universal input
- Constant current
- not dimmable
- Plastic housing IP66
- Overload protection by current limiting
- Protected against short circuit, overload, overvoltage
- For LED and lighting applications
- Protection class II
- Safety standards: UL 8750; UL 1310; IEC 61347-2-13; EN 61347-2-13; IEC 61347-1; EN 61347-1
- EMC standards: EN 55015
- 3 years manufacturer warranty



Technical Specifications



Input Voltage:	90...264V AC (47...63Hz)
	120...370V DC
Input Inrush Current, Max.:	10A
Withstand Voltage (I/P-O/P):	3750V AC
Operating Temperature:	-20...+40°C
Dimensions(LxWxH):	52.1x29.6x23.1mm
Weight:	45g

I/P = Input, O/P = Output



Part Nr.	U_A	I_A	P_A	I_{RN}	h
	[V]	[mA]	[W]	[A _{p-p}]	[%]
RACD03-350	2,5...15	350	3	0,1	72
RACD03-700	2,5...6	700	3	0,1	62

U_A = Output Voltage, I_A = Output Current, P_A = Output Power, I_{RN} = Ripple & Noise, h = Typ. Efficiency

Productinformatie

Artikelnummer	RACD03-700
Merk	RECOM

