


**PULSE TRAF0 1.1MH 1:1:1**

**€ 7,95**

Excl. BTW: € 6,57

**Afbeeldingen**

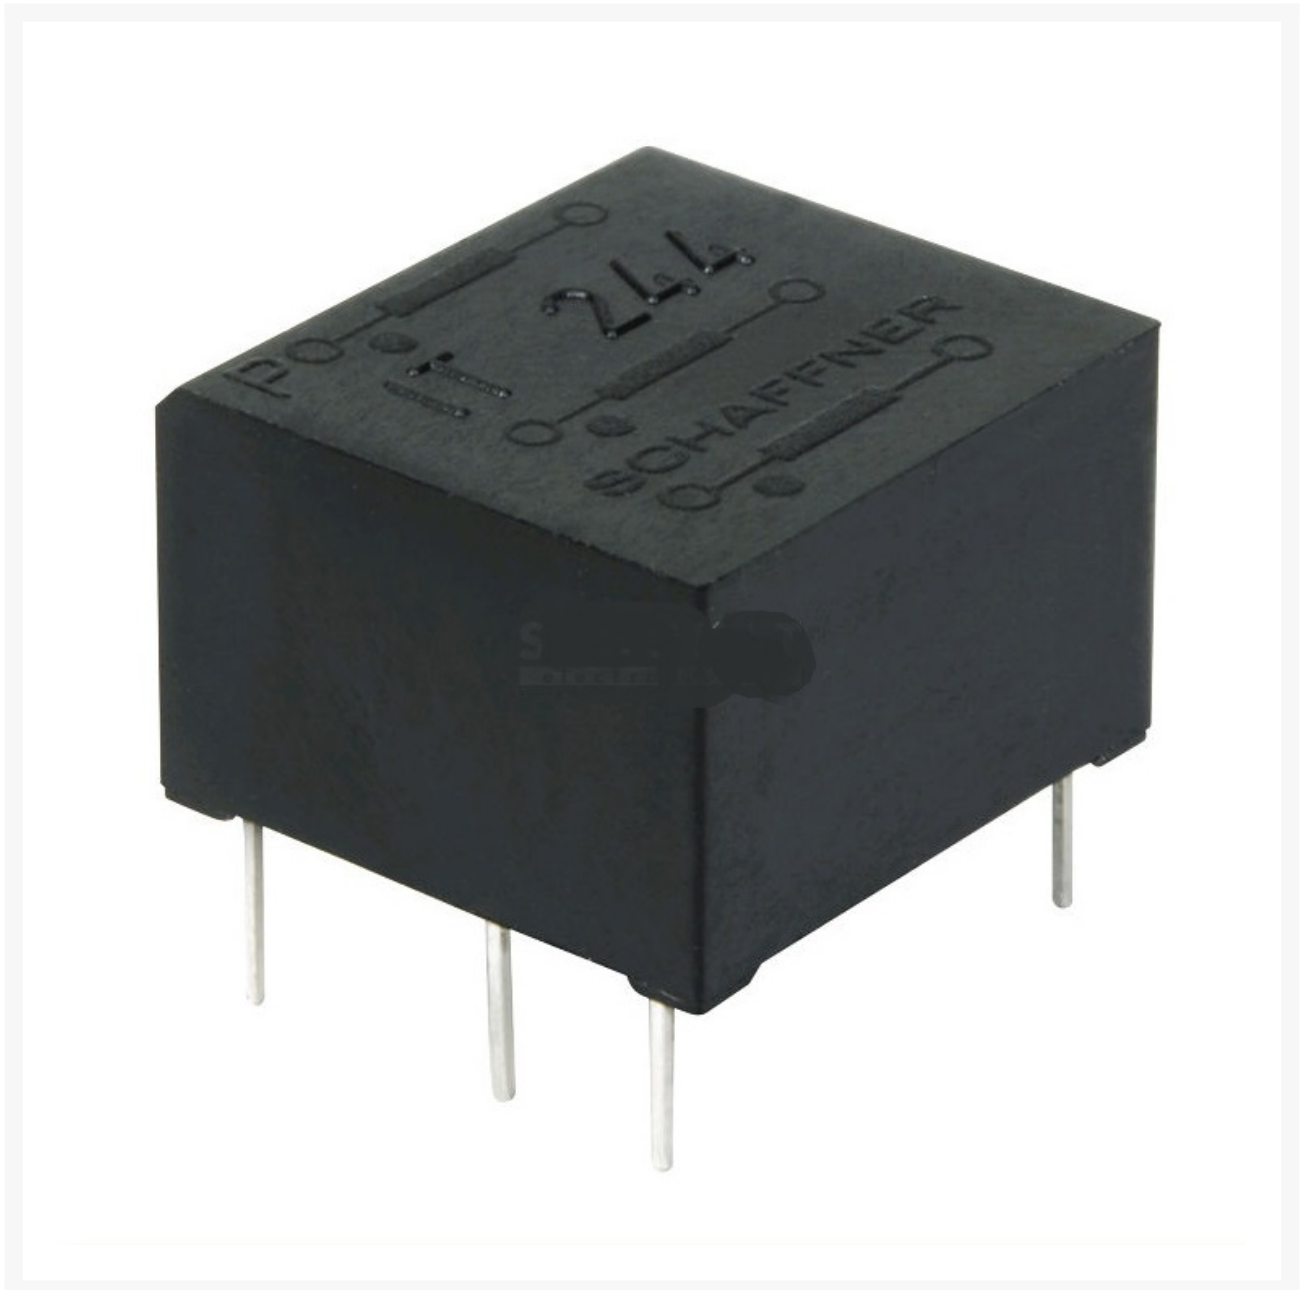

**Beschrijving**

**Features**

- Single and double secondary winding
- Vacuum potting
- Allows high potential difference voltage scaling
- Very low partial discharge effects
- PCB through-hole mounting



## Technical Specifications



Max. Operating Frequency: 40kHz

Temperature Range: -25...+70°C



Part Nr.	Transformation	$I_{ign}$ [A]	L [mH]	$R_{prim}$ [Ohm]	$R_{sek}$ [Ohm]
IT213	1:1:1	0,25	6,5	1,4	1,4
IT233	1:1:1	0,25	3	0,8	0,8
IT239	1:1	0,25	3	0,9	0,9
IT242	1:1:1	0,1	2,5	0,75	0,75
IT243	1:1:1	0,1	2,5	0,8	0,8
IT244	3:1:1	0,1	15	2,8	0,9
IT245	1:1	0,1	8	1,48	1,48
IT246	2:1	0,1	7	2,1	1,1
IT248	2:1	0,25	17	3,2	1,6
IT249	2:1:1	0,25	17	3,1	1,5
IT253	1:1:1	0,25	1,1	0,55	0,55
IT255	1:1	0,25	2,2	0,8	0,8
IT258	1:1	1	2,5	0,62	0,75
IT260	3:1	0,1	12	2	0,8
IT313	1:1:1	1	3	0,33	0,4
IT314	3:1:1	1	35	1,6	0,7

$I_{ign}$  = Ignition Current @ 40°C, L = Inductance,  $R_{prim}$  = Primary DC Resistance,  $R_{sec}$  = Secondary DC Resistance

## Productinformatie

---

Artikelnummer	IT253
Merk	SCHAFFNER

