


FLUX EN DROOG TANK

€ 1.119,00

Excl. BTW: € 924,79

Afbeeldingen

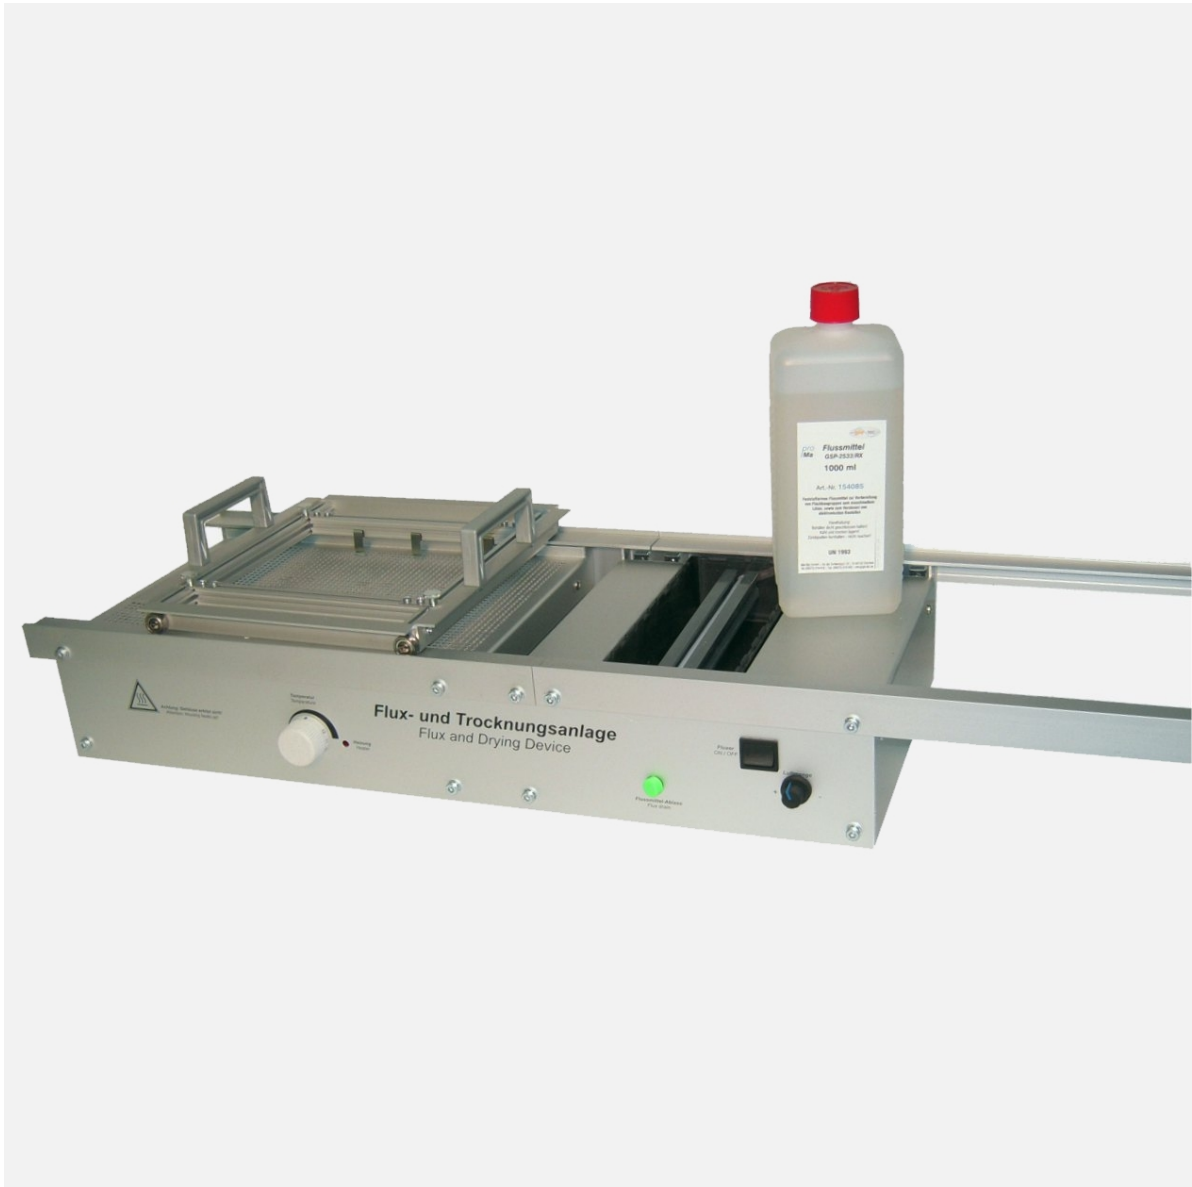

Beschrijving

Application

For preparing populated boards for dip soldering or unpopulated boards for roller-tinning. The height and width of fluxing and drying tank 1 conform to tinning and soldering tank 1.



Features

- Anodized aluminium housing (LxWxH): 620x260x120mm (length: 820mm with guidance for soldering bogie)
- Foam fluxer can be switched off, capacity 400m³
- Flux container with integral air supply, efficient flux pump capacity 250l/h. Flux can be drained
- Fine, precise control plastic tube foam head
- Capable of utilising low-solid content flux
- Heating plate for pre-heating and drying
- Power consumption 230V/2000W
- Flux bogie FT149221, used as tinned and soldering bogie for boards up to 180x180mm

Productinformatie

Artikelnummer	FT142301
Merk	GIE-TEC

