


DIN-RAIL 63MM VOEDING 240W 24V/10A

€ 68,50

Excl. BTW: € 56,61

Afbeeldingen

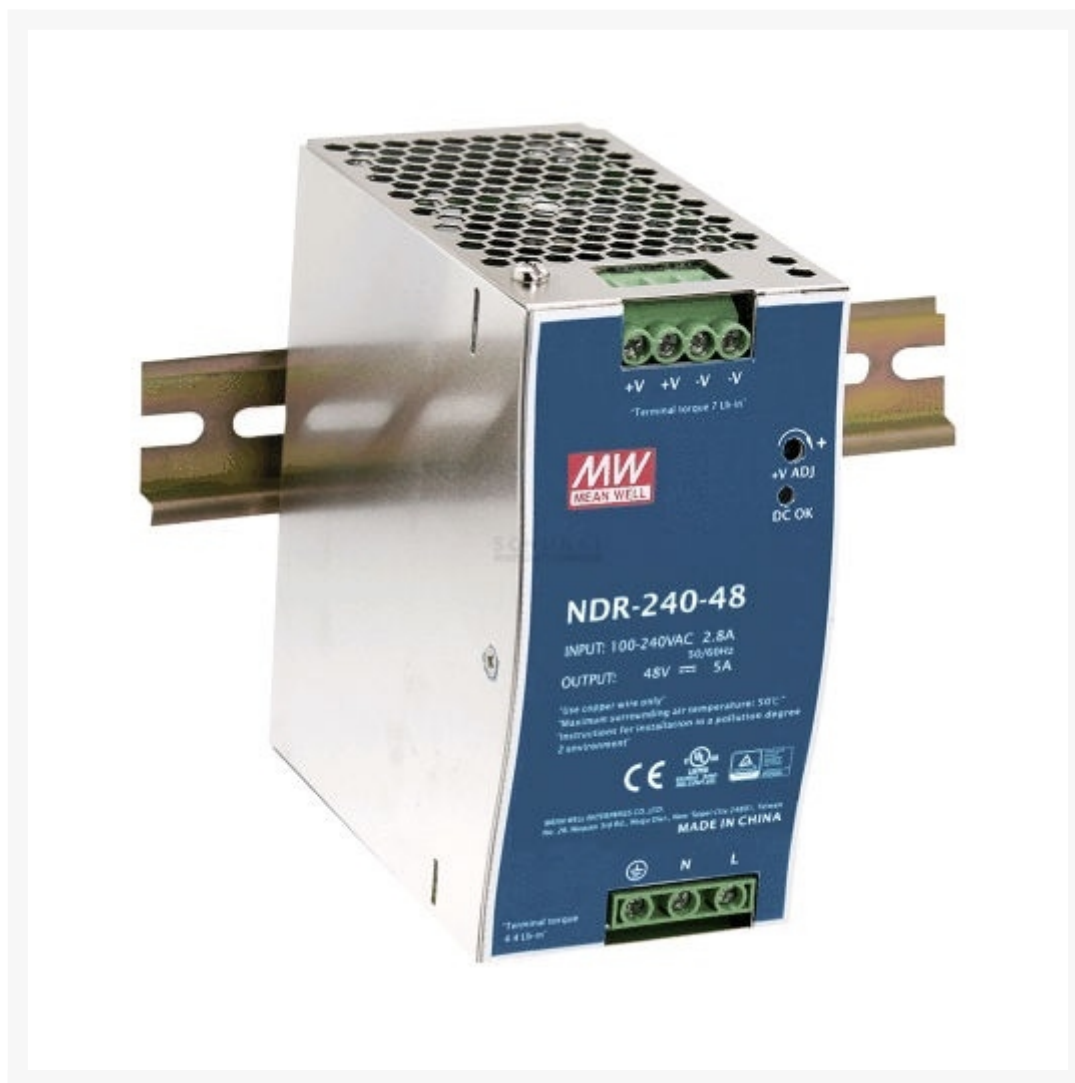

Beschrijving

Features

- Direct assembly on DIN Rail
- Enclosed case, Touch-guard screw terminals
- Universal input
- Overload protection, current limiting, auto recovery
- Protections: short circuit/over load/over voltage
- DC OK LED display



Technical Specifications



Input Voltage:	90...264V AC (47...63Hz)
	127...370V DC
Input Inrush Current, Typ.:	35A
Leakage Current, Max.:	1mA
Output Voltage Adjustment:	+15%
Over Load Protection:	105...130%
Withstand Voltage	
I/P-O/P:	3000V AC
I/P-FG:	2000V AC
O/P-FG:	500V AC
Operating Temperature:	-20...+70°C
Weight:	1000g

I/P = Input, O/P = Output, FG = Frame Ground



Part Nr.	U_A	I_A	P_A	DU_A	U_{RN}	h
	[V]	[A]	[W]	[%]	[mV _{p-p}]	[%]
NDR-240-24	24	0...10	240	1	150	88,5
NDR-240-48	48	0...5	240	1	150	90

U_A = Output Voltage, I_A = Output Current Range, P_A = Output Power, DU_A = Output Voltage Tolerance, U_{RN} = Ripple & Noise, h = Efficiency

Productinformatie

Artikelnummer	NDR24024
Merk	MEANWELL

