



VIBRATIEMOTOR 2.4VDC 100MA 13000RPM STUKS

€ 32,95

Excl. BTW: € 27,23

Afbeeldingen

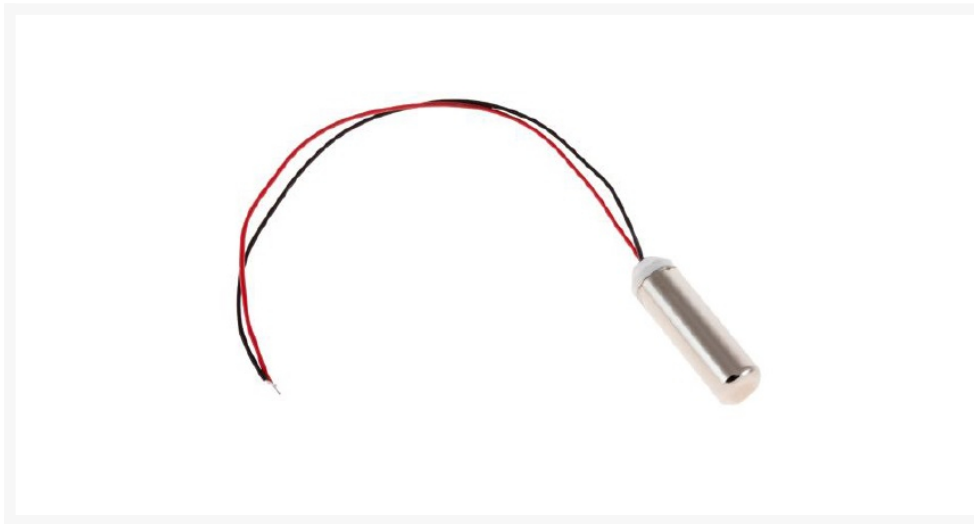

| TYPE | UNIT | VM072A3L4WP |
|-------------------------|-----------------|-------------|
| Rated Voltage | V _{DC} | 2.4 |
| Operating Range Voltage | V _{DC} | 1.0 - 3.6 |
| Start Voltage | V _{DC} | 0.8 |
| Rated Current | mA | <100 max. |
| Rated Load Speed | rpm | 15000±10% |
| Start Current | mA | <100 max. |
| Terminal Impedance | Ω | 16±5% |
| Weight | g | 3.6 |

* Value applying at rated voltage

Beschrijving

Features

- Low weight
- Small dimensions
- VM_₋SMD: SMD version
- Typical applications: Mobile devices, GPS devices, pagers or toys



Technical Specifications

| Part Nr. | U _N | I _N | I _A | N | W |
|----------|----------------|----------------|----------------|-------|-----|
| | [V DC] | [mA] | [mA] | [rpm] | [g] |
| VM0610A3 | 3 | 150 | 200 | 10000 | 1,7 |
| VM0702A3 | 3 | 80 | n. i. | 10000 | 1 |
| VM1002A3 | 3 | 80 | 120 | 10000 | 2 |
| VM1003A3 | 3 | 85 | 140 | 13500 | 2 |

| | | | | | |
|----------|-----|-----|-----|-------|-----|
| VM0724A2 | 2,4 | 100 | 160 | 13000 | 3,6 |
| VM2702A2 | 2,7 | 65 | 90 | 14000 | 0,6 |
| VM12C3 | 3 | 214 | 380 | 14300 | 6,2 |
| VM12C5 | 5 | 111 | 200 | 14380 | 6,2 |

U_N = Rated Voltage, I_N = Rated Current (@ max. Effizienz), I_A = Max. Starting Current, I_L = No-load Current, N = No-load Speed, W = Weight, n. i. = no information by the manufacturer

Productinformatie

| | |
|---------------|----------|
| Artikelnummer | VM0724A2 |
| Merk | EKULIT |

