


TAPO SMART VIDEO DEURBEL


€ 142,95

Excl. BTW: € 118,14

Afbeeldingen




Flexible Placement, Flexible Views



Different wedge choices give users possibilities to make the doorbell suit a more placement scenario. Users can also use the wedges to adjust the views.




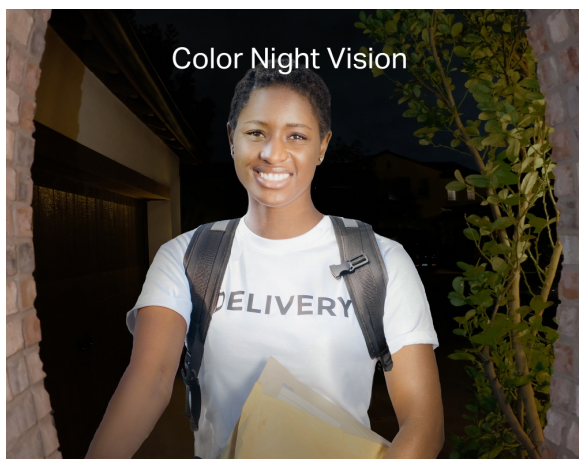

Color Night Vision

With the spotlight and starlight sensor, it reveals high-fidelity details and color at night.

tapo

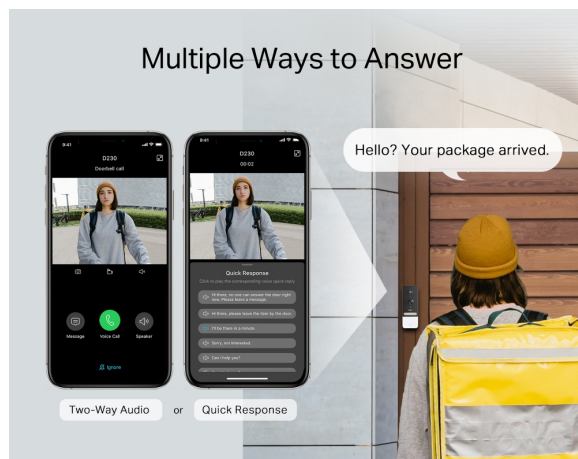

Multiple Ways to Answer

Two-Way Audio or Quick Response

With two-way audio or a recorded quick response, communicate directly with your deliveries through the Tapo app.

tapo



Anti-Theft Alarm

Be alerted when someone trying to take the doorbell off with anti-theft alarm function.

tapo

Person/Pet/Vehicle/Package Detection



Powerful AI identifies person, pet, package, and vehicle, notifying users as needed.

tapo

Beschrijving

Tapo smart-videodeurbel op batterijen

- **Liveweergave in 2K 5 MP:** Met de Tapo app zie je altijd wat er voor je deur gebeurt. De camera beschikt over een sterrenlichtsensor en biedt een resolutie van 2K 5 MP zodat alle fijne details zelfs bij slechte lichtomstandigheden worden vastgelegd.
- **Nachtzicht in kleur:** Met de ingebouwde spotlamp en sterrenlichtsensor biedt Tapo D230S1 ook 's nachts details en kleuren met hoge getrouwheid.
- **Weergave van top tot teen :** De brede kijkhoek (160° diagonaal) en de 4:3 liveweergave stelt gebruikers in staat

om bezoekers bij een afstand van 1 m[†] van top tot teen te bekijken. Tapo toont meer verticale details dan andere 16:9 deurbellen.

- **Flexibel te plaatsen voor flexibele weergaven:** Gebruikers kunnen kiezen uit verschillende wighoeken om de deurbel in de juiste positie te plaatsen. Je kunt de wighoek ook gebruiken om de kijkhoek te wijzigen.
- **Langere batterijduur** De oplaadbare en verwijderbare batterij met protocol voor laag vermogen verlengt de gebruiksduur.
- **Slimme AI-detectie en meldingen:** Slimme AI-algoritmen identificeren personen en auto's en sturen gebruikers indien nodig een melding.
- **Meerdere antwoordmogelijkheden:** Met tweeweg audio of een opgenomen reactie kun je direct via de Tapo app met de pakketbezorger communiceren.
- **Flexibele opslagmogelijkheden:** Sla opgenomen video's op de microSD-kaart[§] van de hub op (tot 512 GB) of maak gebruik van de cloudopslagdiensten van Tapo Care^Δ.
- **Antidiefstal-alarm:** Met de functie antidiefstal-alarm ontvang je een melding als iemand probeert de deurbel mee te nemen.
- **Water- en stofbestendig – IP64:** Werkt goed tijdens regenachtige dagen en in vochtige omgevingen.

Langere batterijduur

De oplaadbare en verwijderbare batterij met protocol voor laag vermogen verlengt de gebruiksduur.

6700 mAh

Werkt tot 180 dagen[‡]

Aantal activeringen

Batterijduur[‡]

10 keer
30 s/per clip

6 maanden
Huis met tuin

20 keer
30 s/per clip
3 maanden
Appartement

60 keer
30 s/per clip
1 maand
Huis aan de weg

CAMERA

Beeldsensor 1/2.7"

CAMERA

Lens	F/NO: 2,1
Night Vision	850 nm infraroodled tot 7,6 m
Lighting	Built-in Spotlights
Hub Compatibility	Compatible with H200 (Included)
Interface & Button	1× RESET Button 1× Doorbell Button 1× Anti-Theft Button
Weatherproof Rating	IP64
Kijkhoek	160° diagonaal
Resolutie	2K 5 MP (2560 × 1920 px)

HUB

Device Compatibility	Works with Tapo smart sensors, buttons, Sub-1G switches, cameras, and video doorbells. All Supported Products>
Connection Capacity	Up to 64 Sub-1G switches, sensors, or buttons + 4 cameras or video doorbells
Interface & Button	1× Ethernet Port 1× RESET Button 1× MicroSD Card Slot (Up to 512 GB) 1× SYNC Button

VIDEO & AUDIO

Maximum Resolution	2K 5MP (2560 × 1920px)
Frame Rate	15 fps
Digital Zoom	16x
Video Compression	H.264
Live View	Yes
Image Enhancement	3DNR WDR
Audio Input & Output	Built-in Microphone and Speaker
Audio Communication	Two-Way Audio with Noise Cancellation
Siren Volume	Doorbell: 96 dB (Anti-theft siren, Level measured at 4-inch/10-cm distance) Hub: 100 dB (Level measured at 4-inch/10-cm distance)

STORAGE

Local Storage	MicroSD Card Slot on Hub (Up to 512 GB) General Information about using MicroSD Cards >
Cloud Storage	Tapo Care Cloud Storage Services (Subscription required)

VIDEO

Frame Rate	15 fps
Video Streaming	2K 5MP
Video Compression	H.264
Audio Compression	G.711

DETECTION and NOTIFICATIONS

Sensor	Single PIR Motion Sensor (FOV: 130° horizontal) One Ambient Light Sensor
AI Detection	Motion Detection Person Detection Pet Detection Vehicle Detection Package Detection
Activity Zones	Yes *Only works with Motion Detection.
Output Notification	System Notification System Notification with Snapshot (Tapo Care Services)

AUDIO

Audio Communicatie	Tweeweg audio
Audio Input & Output:	Ingebouwde microfoon en speaker

Netwerk

Network Connectivity	Connect via Wi-Fi
Wireless Connectivity	IEEE 802.11b/g/n, 2.4 GHz Wi-Fi Sub-1G, 868MHz (Used for local connection between doorbell and hub)
Protocol	TCP/IP, ICMP, DNS, HTTPS, TCP, UDP
Ethernet Port	1× 10/100 Mbps RJ45 Port on Hub
Wireless Security	WPA/WPA2-PSK
Standaarden en Protocollen	IEEE 802.11b/g/n, 2.4 GHz
Beveiliging	128-bits AES-versleuteling met SSL/TLS
Frequency	2.4 GHz

Beveiliging	
Security	On-Device Machine Learning 128-bit AES Encryption with SSL/TLS WPA/WPA2-PSK
POWER	
Power Source	Doorbell: 6700 mAh Removable Rechargeable Lithium-ion Battery Hub: 9V DC Power Adapter
Input Voltage	Doorbell Battery Pack Adapter Input: 100-240 V, 50/60 Hz Hub Adapter Input: 100-240 V, 50/60 Hz, 0.3 A
Output Voltage	Hub Adapter Output: 9.0 V, 0.85 A Doorbell Battery Pack Adapter Output: 5.0 V, 1.0 A Hub Adapter Output: 9.0 V, 0.85 A
DC Power Connector Size	
ACTIVITY NOTIFICATIONS	
Input Trigger	Bewegingsdetectie, pakketdetectie, persoonsdetectie, huisdierdetectie, voertuigdetectie.
Output Notification	Meldingen, snapshots (Tapo Care), clips (Tapo Care).
HARDWARE	
Button	Deurbelknop: Resetten/synchroniseren/antidiefstal Hubknop: Resetten, synchroniseren
Indicator LED	Ledindicator deurbel: Systeemled Ledindicator hub: Systeemled
Adapter Input	Ingangsvermogen deurbeladapter: 100-240 V, 50/60 Hz Ingangsvermogen hubadapter: 100-240 V, 50/60 Hz, 0,3 A
Adapter Output	Uitgangsvermogen deurbeladapter: 5,0 V, 1,0 A Uitgangsvermogen hubadapter: 9,0 V, 0,85 A
Product Dimensions (W x D x H)	Afmetingen camera (L x B x H): 146 x 54,5 x 35,5 mm Afmetingen hub (L x B x H): 71,45 x 71,45 x 31,25 mm
Algemeen	
Smart Integration	Google Assistant, Amazon Alexa
Weather Resistance	IP64
System Requirements	Tapo App: iOS 9.0 or higher, Android 4.4 or higher
Mounting Options	Stick to a Wall Mount to a Wall
Operating Temperature	-20°C~45°C
Storage Temperature	-20°C~45°C
Operating Humidity	10%~90% RH, Non-condensing

Algemeen

Storage Humidity	5%~90% RH, Non-condensing
Dimensions (W x D x H)	Doorbell Dimensions: 5.7 × 0.21 × 1.3 in (146 × 54.5 × 35.5 mm) Hub Dimensions: 2.8 × 2.8 × 1.2 in (71.45 × 71.45 × 31.25 mm)
Verpakkingsinhoud	Tapo Video Doorbell × 1 Tapo H200 Hub × 1 Tapo A100 Battery × 1 DC Power Adapter × 1 USB Adapter × 1 USB Adapter Cable × 1 RJ45 Ethernet Cable × 1 Inclined Mounting Templates × 1 Mounting Templates × 2 Mounting Brackets × 1 15° Mounting Wedge × 1 Doorbell Detaching Pin × 1 Screws and Anchors × 2 Quick Start Guide
Certifications	CE, RoHS, RCM,R-NZ,FCC, EAC, Triman, UKCA

ENVIRONMENT

Operating Temperature	-20°C~45°C
Storage Temperature	-20°C~45°C
Operating Humidity	10%~90% RH, niet-condenserend
Storage Humidity	5%~90% RH, niet-condenserend

Productinformatie

Artikelnummer	D230S1
Merk	TP-LINK
Is on Sale	Nee

