


## AFGESCHERMD 4X0.28MM2 PLAT BLAUW

€ 1,95

Excl. BTW: € 1,61

### Afbeeldingen

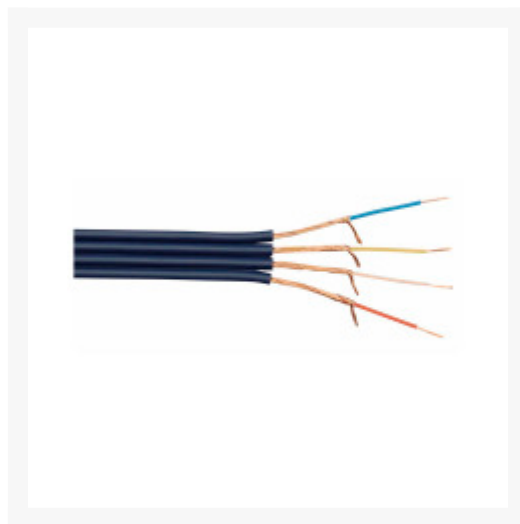

### Beschrijving

#### Specifications

Conductor drains Ø mm: OFC 20 x 0,12

Conductor insulation: PE red

+ transparent

+ yellow + blue

Conductor insulation: 1,3 (Ø in mm)

1st shield: OFC twisted

32 x 0,12

2nd shield: -

Outer isolation: PVC dark blue

Outer isolation: 4 x 4 (Ø in mm)

Conductor resistance: 80 Ohm/Km

Shield resistance: 50 Ohm/Km

Cap. Inner conduct. Shield

/Inner conduct.: 160 pF/m

Working temperature: -20~60 °C (min./max.)

Working Voltage overflash: 30V

Nom Impedance: 35 Ohm

#### Attenuation:

10 MHz: 0,02480 / 90 MHz: 0,28000 / 100 MHz: 0,28530 / 220 MHz: 0,55350 / 470 MHz: 1,33130 / 770 MHz: 2,21180  
/ 1000 MHz: 3,0271

## Productinformatie

---

Artikelnummer	AKO4028P
Merk	DAP AUDIO
Is on Sale	Nee

