


SPANNINGSREGELAAR 2V-37V 0,15A DIP14

€ 1,16

Excl. BTW: € 0,96

Afbeeldingen

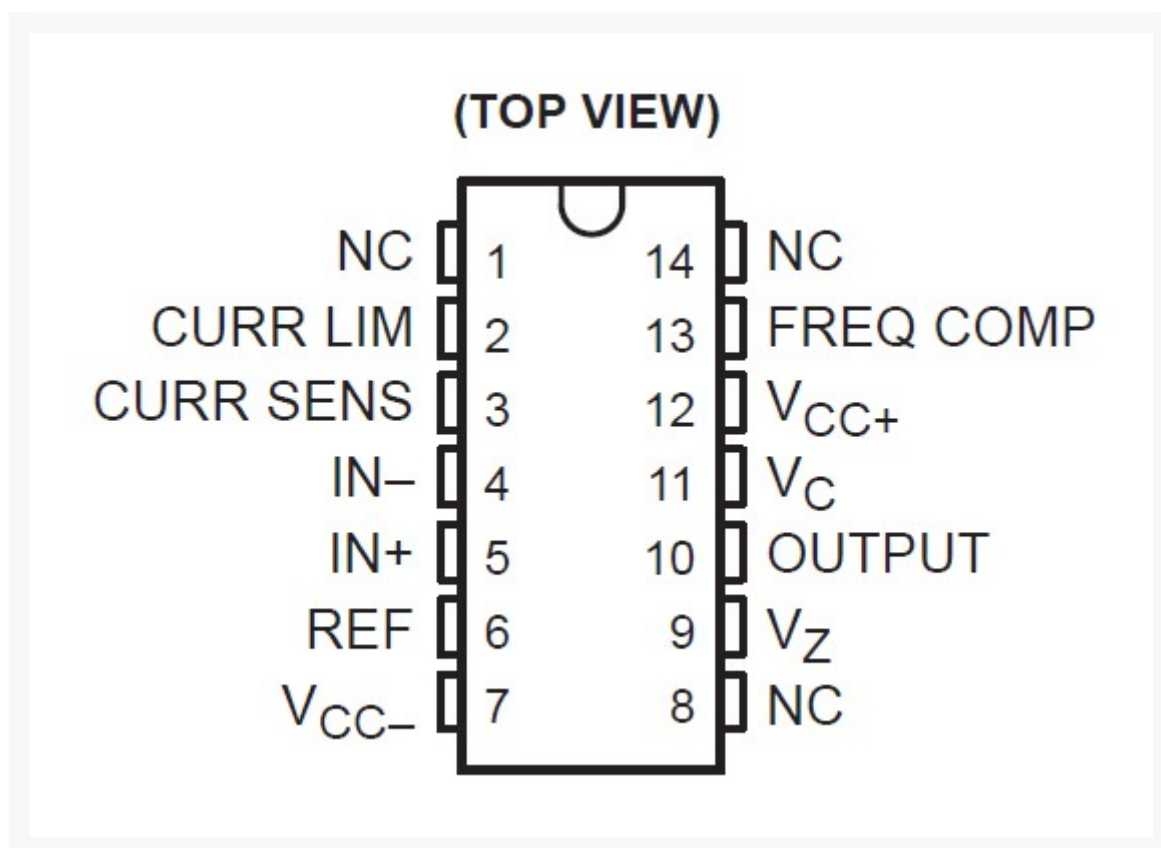

Beschrijving

Peak voltage from VCC+ to VCC- (tw 3 50 ms)	50 V
Continuous voltage from VCC+ to VCC-	40 V
Input-to-output voltage differential	40 V
Differential input voltage to error amplifier	±5 V
Voltage between noninverting input and VCC-	8 V
Current from VZ	25 mA
Current from REF	15 mA
Package thermal impedance, qJA (see Notes 1 and 2): D package	86°C/W
N package	101°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D or N package	260°C
Storage temperature range, Tstg	- 65°C to 150°C

Artikelnummer	UA723N14
Merk	Merk
Is on Sale	Nee

