


POLYESTERFOLIE 330N 100V 5MM

€ 0,54

Excl. BTW: € 0,45

Afbeeldingen

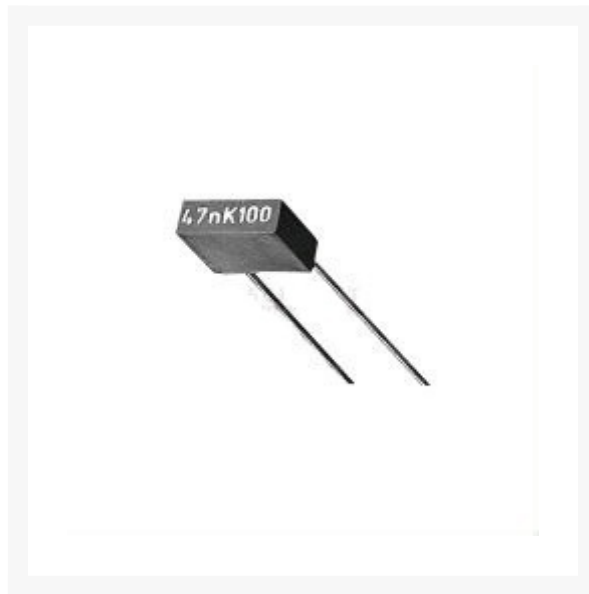

Beschrijving

Features

- Dielectric, polyester film (polyethylene terephthalate)
- Box material is solvent resistant and flame retardant according to UL94V-0
- Tinned wire leads
- Low attenuation
- High pulse rating



Technical Specifications



Rated Voltage (U_N):	See Table
Test Voltage (2s; 25 ^{±50} C):	1,4x U_N
Capacitance Tolerance (1kHz):	±10%

Temperature Range:	-55...+105°C
Climatic Category	
IEC 60068-1:	55/100/56
Insulation Resistance, Min.	
to incl. 330nF:	15GOhm
330nF...1µF:	5000s
from 1µF:	1000s
Pulse Rise Time, Max. (du/dt)	
100V DC:	100V/µs
63V DC:	70V/µs
Reliability (MIL HDB 217) (40°C, 0,5 x U _N):	1,0fit ¹⁾

¹⁾ 1fit = 1x10⁻⁹ Failure Components/Hour

Productinformatie

Artikelnummer	MKT233
Merk	KEMET

