


COAX RG174 ZWART 50? 29DB 3MM

€ 1,25

Excl. BTW: € 1,03

Afbeeldingen

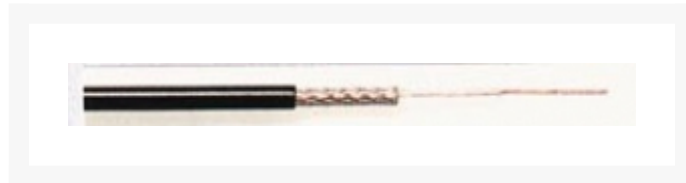

Beschrijving

Specifications For RG174/U

RG Type: 174/U

Conductor: 26 AWG 7/34 Copper Covered Steel

Insulation: Solid Polyethylene

Nom. Core O.D.: 0.044 in

Shielding: Tinned Copper

Jacket: PVC, Black

Nom. O.D.: 0.105 in

UL Style: 1354

Nom. Attenuation:

3.3 db/100 ft at 10 MHz

5.8 db/100 ft at 50 MHz

8.4 db/100 ft at 100 MHz

12.5 db/100 ft at 200 MHz

19.0 db/100 ft at 400 MHz

29.0 db/100 ft at 700 MHz

34.0 db/100 ft at 1000 MHz

Power (Watts):

100 MHz 0.10watts

400 MHz 0.05watts

1000 MHz 0.03watts

Nom. Velocity of Propagation: 83%

Nominal Capacitance: 16.2 pF/ft

Nominal Impedance: 50 ohms

Operating Temperature: 80 °C

Cutoff Frequency: 1000Mhz (1Ghz)

Productinformatie

Artikelnummer	RG174
Merk	Merk
Is on Sale	Nee

